

## **EH020**

ON-PREMISE LAUNDRY E-SERIES 20-POUND CAPACITY HIGH-PERFORMANCE WASHER-EXTRACTOR




2500 State Road 44 • Oshkosh, WI 54904 920.231.8222 • FAX 920.231.4666 www.continentalgirbau.com

Capacity lbs (kg)	20 (8)
Cylinder Diameter inch (mm)	21.1 (536)
Cylinder Depth inch (mm)	13.8 (351)
Cylinder Volume cu ft (dm³)	2.8 (79.2)
Net Weight Ibs (kg)	249 (113)
Crated Weight Ibs (kg)	271 (123)
Machine Width inch (mm)	27 (685)
Machine Depth inch (mm)	27.6 (700)
Machine Height inch (mm)	42.5 (1080)
Door Opening inch (mm)	12.7 (322)
Floor to Door inch (mm)	15.4 (390)
Shipping Dimensions inch (mm) (WxDxH)	28.3 x 29.1 x 47.7 (720 x 740 x 1212)
Washing Speed rpm	50
Spin Speeds rpm	50/100/400/600/800/970
G-force	0.75/3/49/108/192/300
Static Force Transmitted Ibs (kg)	340 (154)
Dynamic Force Transmitted lbs (kg)	115 (52)
Frequency of Dynamic Force Hz	16.2
Available Voltages/Wire Conductor/Am Hot Water (standard) Hot Water (standard) Electric Auxiliary Heat (optional) Electric Auxiliary Heat (optional)	p 120/60/1, 3-prong cord, 15 Amp 208-240/60/1, 2W + G, 5 Amp 208-240/60/1, 2W + G, 20 Amp 208-240/60/3, 3W + G, 20 Amp
Modified Energy Factor (MEF)*	2.21
Water Consumption Factor (WCF)*	5.03
Drain Diameter inch (mm) Pump Drain Gravity Drain	1 (25.4) 2 (51)
Water Inlets inch (mm)	3/4 (19)
Recommended Water Pressure PSI (bar)	30-60 (2-4)
Water Flow gal/min (I/min)	8 (30)
Total Power kW	0.8
Electric Heating Power (optional) kW	4.3



<sup>\*\*</sup> Specifications subject to change without notice or obligation. Call Continental Girbau Inc for dimensions not shown or for clarification.

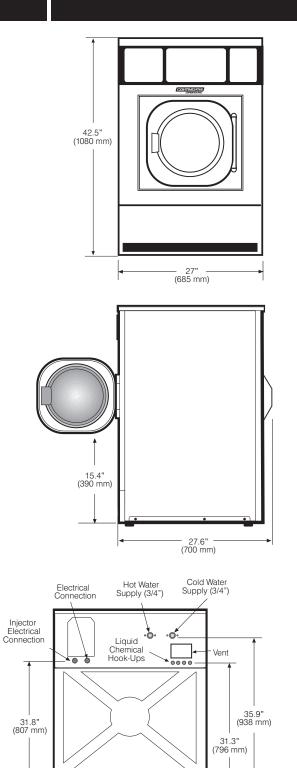

— 21.5" — (546 mm)